

CS6060B BLANC 60x60 | 24"x24" FLOOR
DE23PE PETAL Ø 23 | Ø 9" WALL



DÈCOR

MIX WHITE
Ø 23 | Ø 9"




DE23W WHITE Ø 23 | Ø 9" FLOOR
DE23W WHITE Ø 23 | Ø 9", DE23R ROSE Ø 23 | Ø 9", DE23PO POINTS Ø 23 | Ø 9", DE23PE PETAL Ø 23 | Ø 9" WALL

La gamma di colori del momento caratterizza la collezione Décor: dal millennial pink al verde foresta, la palette è formata da colori che si bilanciano perfettamente. Décor si distingue per la sua energia cromatica. Sei tinte unite impreziosite da una gamma di sei texture declinate in pèndant permettono di scegliere il tono che maggiormente si addice alla vostra cifra stilistica.

The range of colors of the moment characterizes the Décor collection: from the millennial pink to the forest green, the palette is formed by perfectly balanced colors. Décor is distinguished by its chromatic energy. Six solid colors embellished with a range of six textures declined in pèndant allow you to choose the tone that best suits your style.

DÉCOR

Ø 23 | Ø 9"

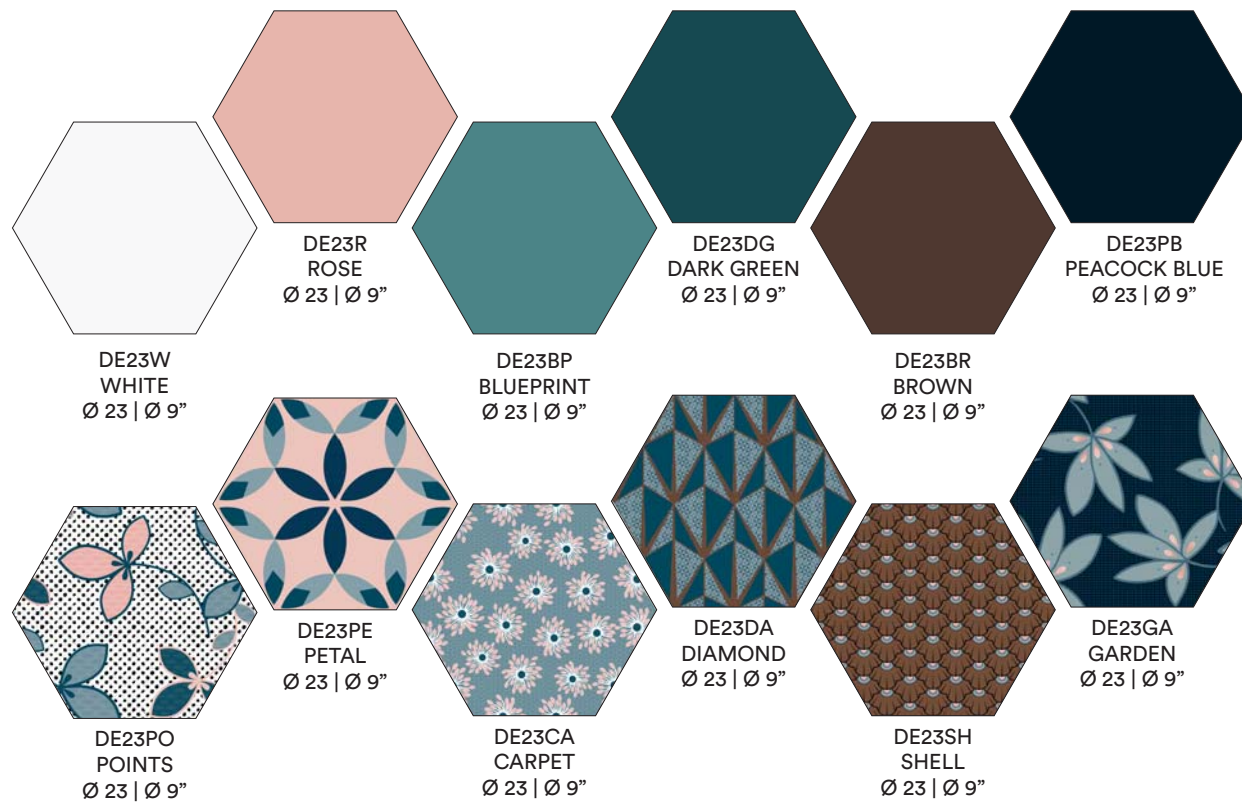


Collezione ceramica di rivestimenti nel formato esagonale di Ø 23 cm in cui il colore torna ad essere assoluto protagonista degli spazi. Molteplici combinazioni per rompere gli schemi.

Ceramic collection of coverings in hexagonal format of Ø 23 cm in which the color returns to be the absolute protagonist of the spaces. Multiple combinations to break the rules.

LAYOUTS

MIX DÉCOR

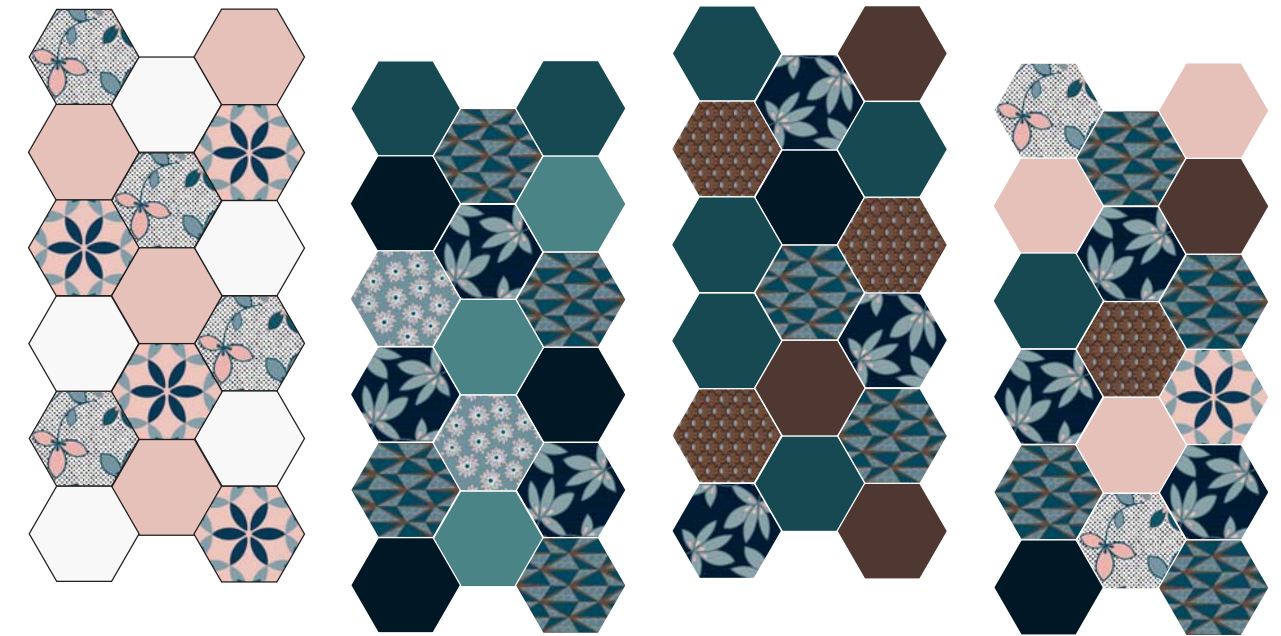

MIX WHITE Ø 23 | Ø 9"

MIX GREEN Ø 23 | Ø 9"

MIX BROWN Ø 23 | Ø 9"

MIX MULTICOLOUR Ø 23 | Ø 9"

INFO TECH


DECORS & TECH.FEATURES

UNI EN14411:2016 App. GL. (Bla Group)


NORMA STANDARD	CARATTERISTICHE FEATURES	VALORI LIMITI PREVISTI ESTABLISHED LIMITS	VALORI RILEVATI MEASURED VALUES
ISO 10545.3 ASTM C373	Assorbimento d'acqua Water absorption	< 0,5%	< 0,5%
ISO 10545.9 ASTM C484	Resistenza agli sbalzi termici Thermal shock	Resistente Resistant	Resistente Resistant
ISO 10545.13 ASTM C650	Resistenza agli attacchi chimici Chemical resistance	Conforme Complies with the standards	Conforme Complies with the standards
ISO 10545.7 ASTM 1027	Resistenza all'abrasione Deep resistance	100 PEI 0 / 150 PEI I 600 PEI II / 750 - 1500 PEI III 2100 - 6000 - 12000 PEI IV > 12000 PEI V	750 - 1500 PEI III
ISO 10545.14 ASTM CC1378	Resistenza alle macchie Stains Resistance	≥ Classe 3 ≥ Class 3	≥ Classe 3 ≥ Class 3
ISO 10545.12 ASTM C1026	Resistenza al gelo Frost resistant	Conforme Complies with the standards	Conforme Complies with the standards
ISO 10545.4	Resistenza alla rottura Breaking strenght	≥ 28 N/mm ²	≥ 28 N/mm ²

FORMATO SIZE	PZ-MQ PCS-SQM	PZ-SCAT. PCS-BOX	MQ-SCAT. SQM-BOX	SCAT.-PAL. BOX-PAL.	KG-SCAT. KG-BOX	KG-PAL. KG-PAL.	MQ-PAL. SQMS-PAL.
Ø 23 Ø 9"	0,343	12	4,116	70	7,824	547,68	288,12

LAYOUTS

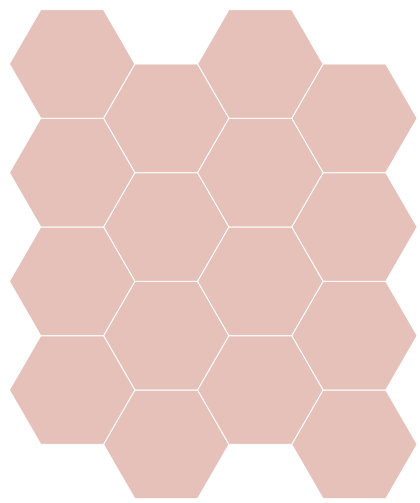


DE23R ROSE Ø 23 | Ø 9"

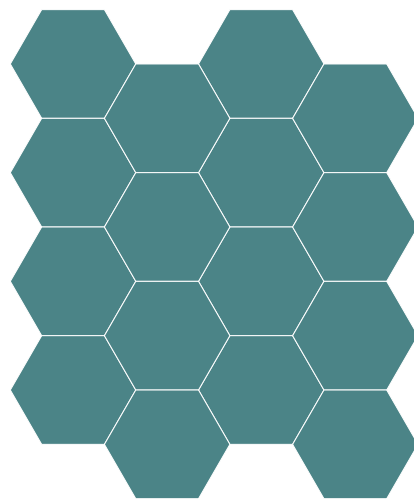


DE23BP BLUEPRINT Ø 23 | Ø 9"



DE23PB PEACOCK BLUE Ø 23 | Ø 9"

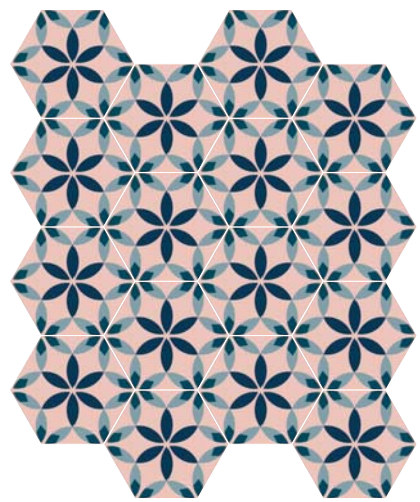


DE23PE PETAL Ø 23 | Ø 9"

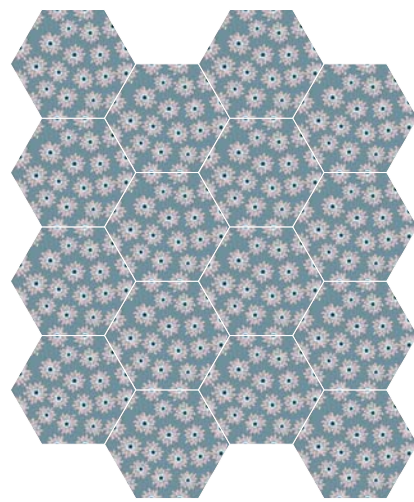


DE23CA CARPET Ø 23 | Ø 9"




DE23GA GARDEN Ø 23 | Ø 9"

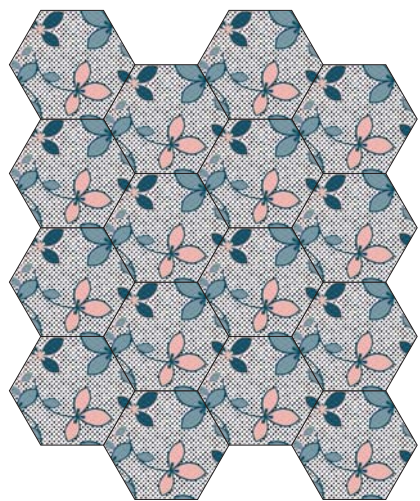

DE23PO POINTS Ø 23 | Ø 9"

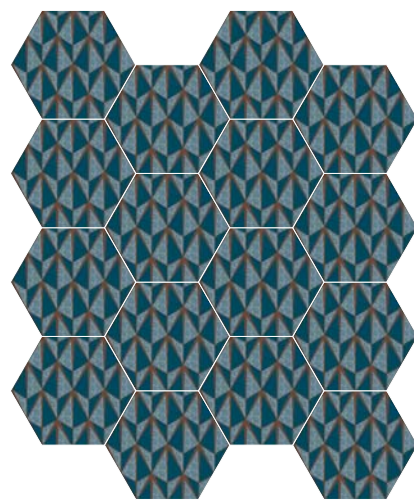

DE23DA DIAMOND Ø 23 | Ø 9"

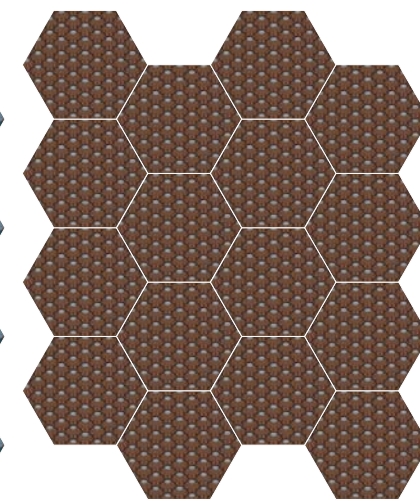

DE23SH SHELL Ø 23 | Ø 9"



SL6060C STILE LIBERO CREAM 60x60 | 24"x24" FLOOR
DE23CA CARPET Ø 23 | Ø 9" WALL